


## Clay/Concrete Roof Tiles Application on High Tensile Lightweight Steel Truss System

Styrofoam\* is, the Trademark of the Dow Chemical Group, an EXTRUDED polystyrene and has been designed with superior technical properties specifically for Building Applications. Due to its 60 year old branding, it has often been misconstrued generically as EXPANDED polystyrene commonly used as packaging material. If you have purchase genuine Styrofoam\* brand products and have reason to doubt, please call us on +603 22841019 or email to [pauline@misb.com.my](mailto:pauline@misb.com.my) for verification.

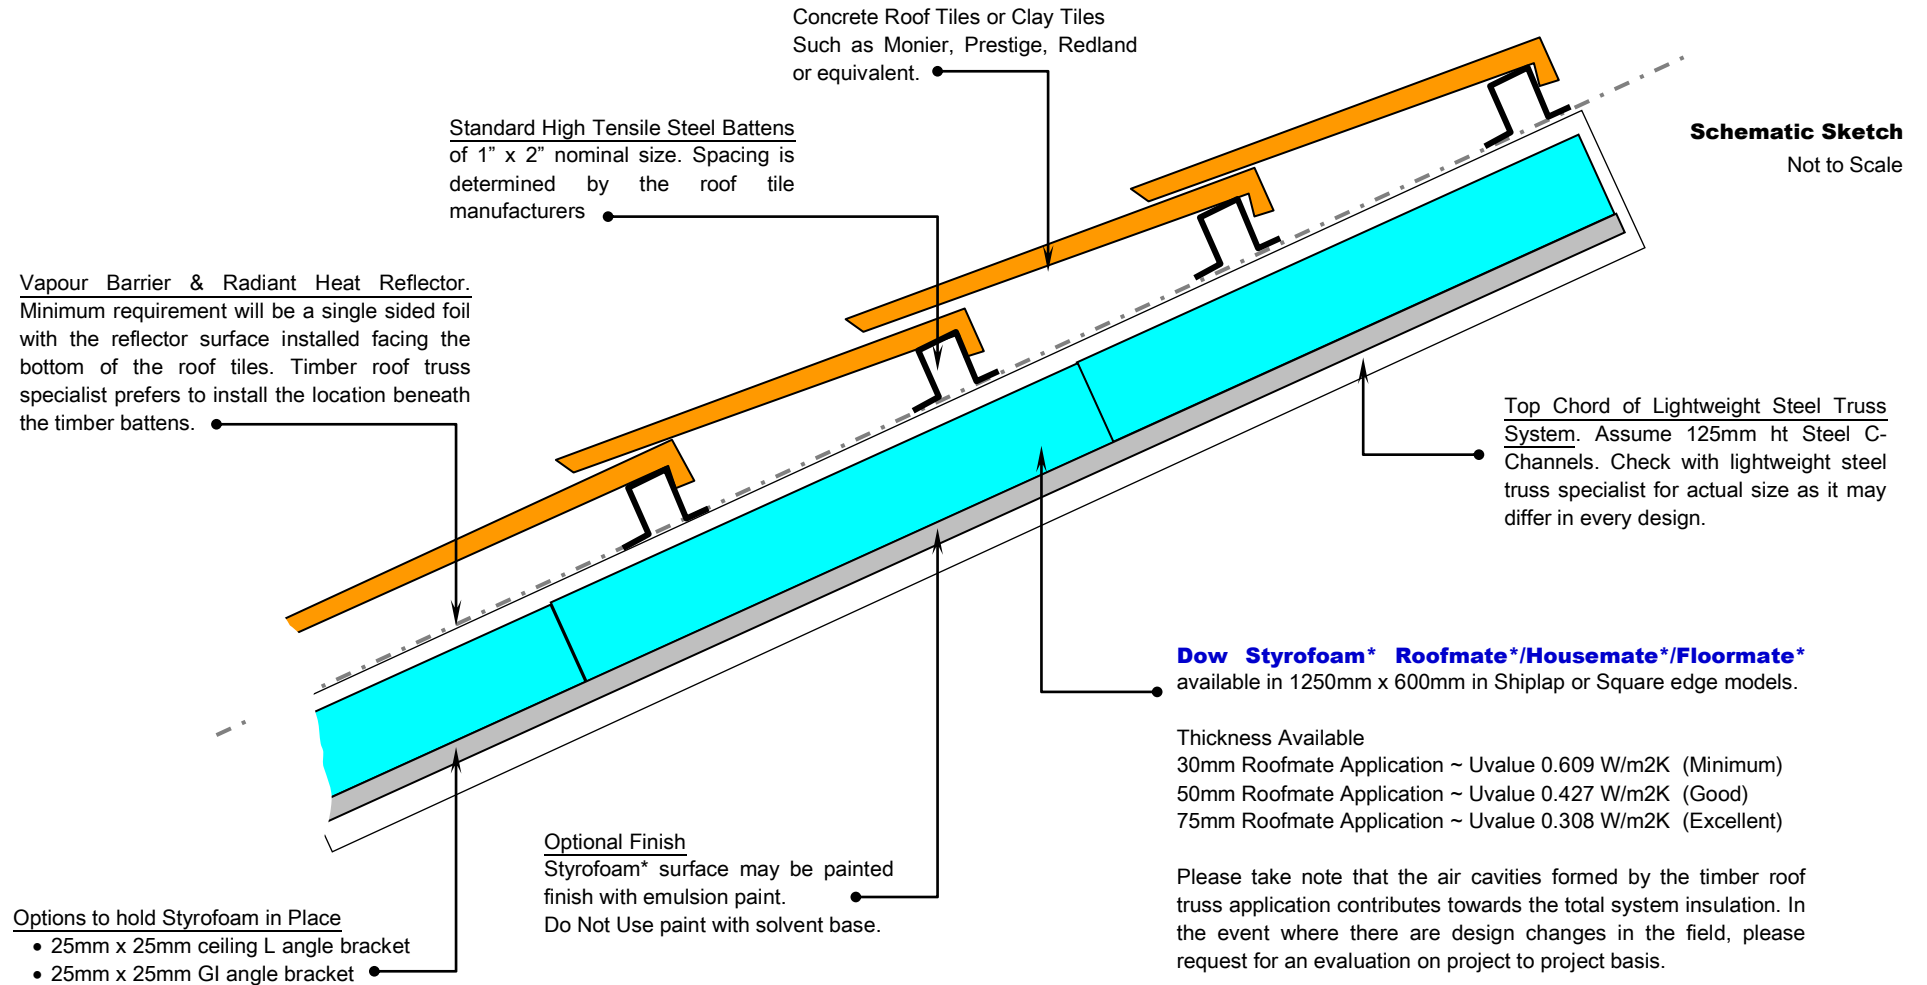

### Note


The above Schematic Sketch is intended to provide some suggestions and ideas of how to incorporate Styrofoam\* Roofmate\* into the design. Site conditions differ on a project basis and therefore the above cannot undermine the final design/s issued by the Truss Specialists and/or Project Consultants appointed who shall determine the final construction details.

## Concrete Roof Tiles Application on High Tensile Lightweight Steel Truss System

Styrofoam\* is, the Trademark of the Dow Chemical Group, an EXTRUDED polystyrene and has been designed with superior technical properties specifically for Building Applications. Due to its 60 year old branding, it has often been misconstrued generically as EXPANDED polystyrene commonly used as packaging material. If you have purchase genuine Styrofoam\* brand products and have reason to doubt, please call us on +603 22841019 or email to [pauline@misb.com.my](mailto:pauline@misb.com.my) for verification.

### Schematic Sketch

Not to Scale

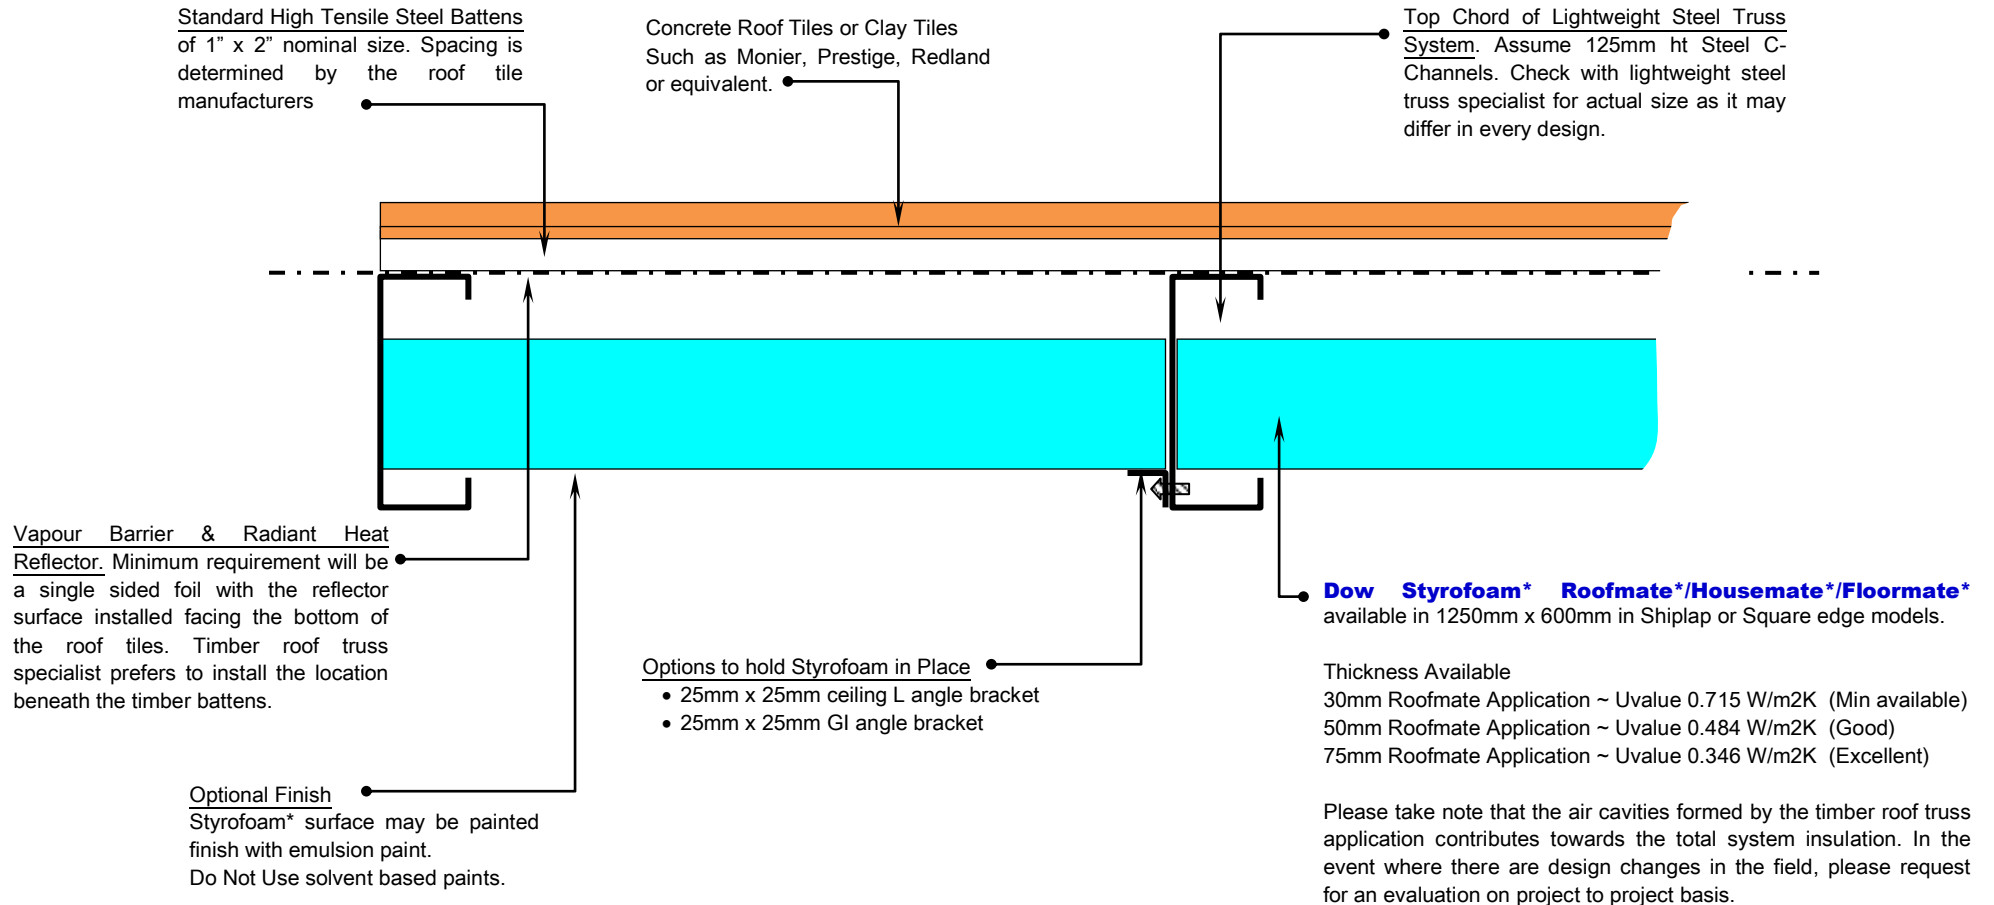

### Note

The above Schematic Sketch is intended to provide some suggestions and ideas of how to incorporate Styrofoam\* Roofmate\* into the design. Site conditions differ on a project basis and therefore the above cannot undermine the final design/s issued by the Truss Specialists and/or Project Consultants appointed who shall determine the final construction details.